

TX 628

Revolutionary Fingerprint Time Attendance Terminal



Tx628 adopts the brand new firmware and provides an unprecedented user experience. It brings innumerable surprises, including the stunning GUI, rock-solid stability, fast matching speed and expandability.

Users can easily manage data by networking TX628 via RS232/485, TCP/IP, USB Host or USB Client. Most importantly, all the functions can still operate in a networking state. TX628 is compatibility with various types of USB flash disks, ADMS and former SDK. It also supports data backup and retrieve to avoid the risk of accidental deletion.

It promotes the fingerprint time & attendance management to the next level. You can get the best of benefits from the TX628.

Features

Remarkable user experience

- Intuitive and stunning UI designed with the most popular and internationalized factor.
- Interface operation adopts modularized hierarchical design. Simpler, Better and More logical.
- Faster matching speed: less than 0.5 second.

Excellent expandability

- Easy to extend functions and customize customers' demand.


Enhanced features and performance

- Support user validity settings.
- Support data backup and retrieve.
- Support advanced Workcode consisted of letters and numbers.
- Support chip encryption for firmware protection.
- Support more flexible menu configuration: double line text display.
- Support external printer for attendance records output (Optional).


Specifications

Fingerprint Capacity	3,200 (1:N)
ID Card Capacity	10,000 (Optional)
Record Capacity	80,000
Display	3-inch Screen
Communication	TCP/IP, RS232/485, USB (host & client)
Standard Functions	Web Server, Short Message, Automatic Status Switch, Self-Service Query, Work Code, T9 input, 9 Digits User ID, DST, Schedule Bell
Optional Functions	ID/Mifare Card, External Printer
Software	ZKTime 5.0 (Free), ZKTime. Net 2.0
Power Supply	DC 5V 2A
Verification Speed	≤0.5 sec
Operating Temp.	0 °C- 45 °C
Operating Humidity	20%-80%
Dimension	180 × 135 × 37 mm (Length × Width × Thickness)
Net Weight	0.70 kg


Configuration

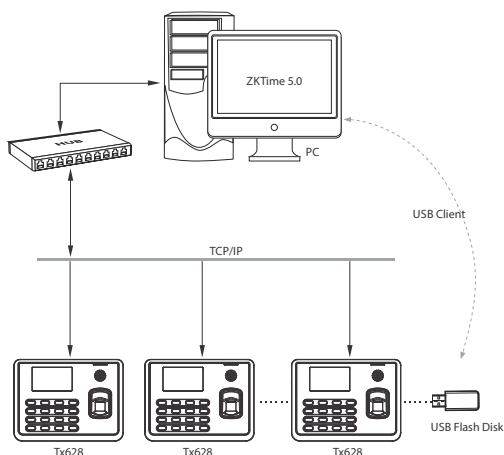


What's in the Box



Tx628



Back Plate



Power Adapter



USB Cable



Software CD (ZKTime 5.0)



Screws and Holders



Star-shape Screw Driver

ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtuo, Bantian, Buji Town, Longgang District, Shenzhen China 518129
Tel: 86-755-8960 2345/46/47/48

Global Offices:

USA: +1 732-412-6007
EU: +34 916532891
Brazil: +55 31 2515-8326
Thailand: +66-027199154
Mexico: +52-55-52928418

South Africa: +27 12 259 1047
Egypt: +201110444134
Dubai: +971 4 6091 310
India: +91 8123536788
Indonesia: +62 21 2921 8949

Vietnam : +84-0169-5813007
Philippines: +63 9084118832
Russia: +8 915 178-46-81